

HC 150

Hydraulic Drifter



- Strong reputation in drilling industry with proven technology
- Easy to adapt on any machine
- Ready for any job

Highly versatile

- Multiple configurations available for all applications
- Compatible with all standard diameters for bolting and facedrilling
- Incorporates similar technologies as larger sized drifters

Trouble-free

- Proven reliability and longer lifespan
- 35 years of continuous research, development and improvements

Multiple customizations

- Piston design can be adapted to ground typology and/or hydraulic oil supply
- Choose from a wide selection of front head material and shapes
- Wide rotation torque and rpm setup range

Weight and dimensions

Weight	190 kg
Overall length	1,745 mm
Height	
Height above shank axis	

Rotation specs

Maximum rotation speed (RPM)	0-140rpm
Maximum pressure (bar)	
Maximum torque (Nm)	881 Nm (650lb-ft)

Impact rating


Maximum output	42 kW
Input range	37 - 50 kW
Percussion flow range (max)	160 l/min
Percussion pressure range (max)	140 bar
Maximum impact frequency (max)	2220 bpm

Flushing flow and pressure

Water flushing	300 l/min
----------------	-----------

Other versions are available; please contact the drilling technical support team for more information.

Penetration rate

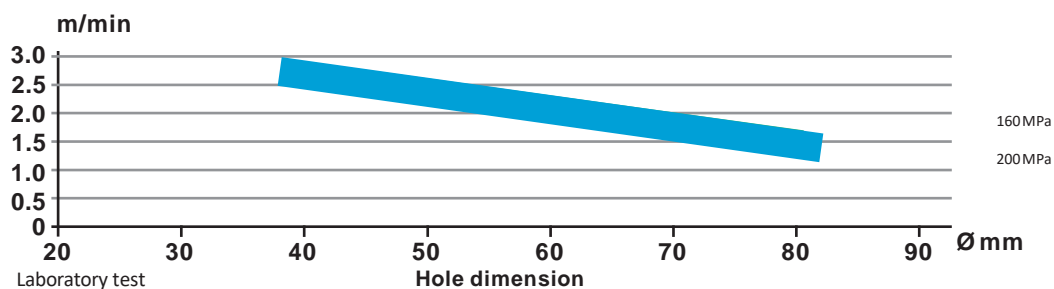

Shank adapters

R38 M
T38 M
T45 M